


## Coaxial PCB Connector 82\_MMCX-S50-0-2/111\_K

### Description

Straight PCB jack

Interface Standards  
SUHNER-MMCX

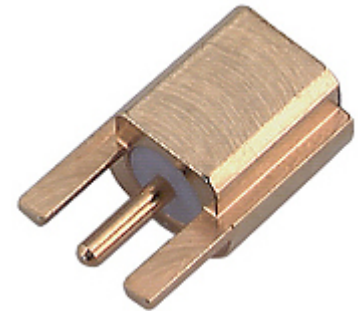

### Technical Data

#### Electrical Data

Impedance 50  $\Omega$   
Interface frequency max. 6 GHz

#### Mechanical Data

Board mounting type edge mount  
Weight 0.0007 kg

#### Environmental Data

Operating temperature -55 °C to 155 °C  
2011/65/EU (RoHS - including  
2015/863 and 2017/2102) compliant

#### Material Data

| Piece Parts    | Material               | Surface Plating                   |
|----------------|------------------------|-----------------------------------|
| Centre contact | Copper Beryllium Alloy | Gold Plating (Nickel underplated) |
| Outer contact  | Brass                  | Gold Plating (Nickel underplated) |
| Body           | Brass                  | Gold Plating (Nickel underplated) |
| Insulator      | PFA / PTFE             |                                   |

### Related Documents

Outline drawing DOU-00013081  
Catalogue drawing DCA-00013083

### Ordering Information

Bulk 100 pcs package 82\_MMCX-S50-0-2/111\_KH  
Tape and Reel package 82\_MMCX-S50-0-2/111\_KG  
Single package 82\_MMCX-S50-0-2/111\_KE